


8'-20' Rotary Cutters

MULTI-SPINDLE ROTARY CUTTERS

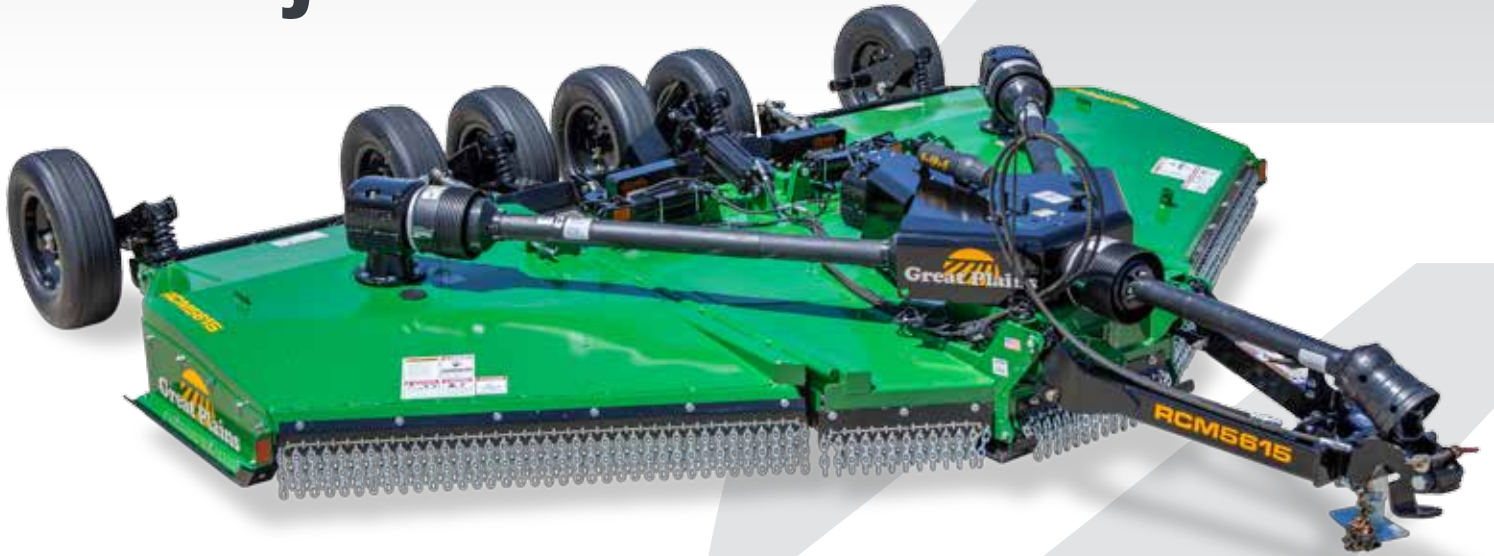

Ag producers of all sizes will find the perfect grounds-maintenance solution in this diverse new line of Rotary Cutters from Great Plains. These multi-spindle cutters are equipped to tackle everything from standing residue in row-crop fields to weeds and brush in overrun pastures.

Great Plains Rotary Cutters are offered in both rigid and folding models, with working widths ranging from 8 to 20 feet. Choose from a variety of standard-duty to extra heavy-duty cutters, with both pull-type and 3-point options available on 8- and 10-foot models. Additionally, both 540 and 1000 RPM drive models are offered to match a variety and range of horsepower. Offset models are also available.

Trailing units are available with a choice of equal-angle or constant-velocity drivelines, along with multiple axle and tire options to fit all conditions. An optional constant-velocity driveline hooked to a large, heavy gearbox can cut brush up to 4½" in diameter. The flat-top deck design prevents chopped material from accumulating on top of the deck and eliminates the need for frequent cleaning. Safety shield options include both chain and double-chain guards.

Whether it's a narrowly-spaced tree grove, gently-sloped ground near a pond or stream, or wide-open pasture, no job is too big – or too small – for these rugged cutters from Great Plains.



Great Plains Ag



@GreatPlains_Ag



Great Plains Ag

www.GreatPlainsAg.com

8'-20' Rotary Cutters



8'-20' Rotary Cutters



Features & Benefits

- **Flat Top Deck Design** - Eliminates accumulation of chopped material on top of the deck and the need for frequent cleaning.
- **Choice of Axle and Tire Options on Trailing Models** - Cutter can be equipped to fit all conditions.
- **Choice of 540 or 1000 RPM Drives** - Match a variety and range of horsepower needs.
- **Pull-Type or 3-point Options (on select models)** - Multiple hitch options provide flexibility when selecting the configuration that best fits individual needs.
- **Equal Angle or Constant Velocity Drivelines (on select models)** - Choice of models available, each addressing one of these specific needs: improved turning radius (over standard driveline models), easier attachment to the tractor, or reduced initial cost.

Type:

Grounds Maintenance Rotary Cutter

Availability:

Currently available

Standard Equipment:

- Spring-cushioned axle
- Adjustable heavy-duty turnbuckles
- Narrow tongue design
- Slip-clutch protection
- Beveled wing skirts
- Front & rear chains
- Deck-mounted spring
- Independent wing hydraulics

Optional Equipment:

- Hitches
- Deck rings
- Tool box



ROTARY CUTTERS	MODEL INFO							
	MODELS	H.P. REQUIREMENTS	WORKING WIDTH (CM)	OVERALL WIDTH	TRANSPORT WIDTH (MIN)	OVERALL LENGTH	MACHINE WEIGHT LB (KG)	CUTTING HEIGHT
RCR2596	40 - 110	7' 10" (239)	8' 3-3/4"	N/A	11' 8-3/4"	1,665 (755)	2" - 12"	1-1/2"
RCR(M)2510	50 - 110	9' 10" (300)	10' 3-1/2"	N/A	12' 6"	2,035 (923)	2" - 10-1/2"	1-1/2"
RCF3096	40 - 110	8' (244)	8' 7"	N/A	8' 6"	1,587 (720)	2" - 12"	2-1/2"
RCF(M)3010	50 - 110	10' (305)	10' 6-1/2"	N/A	10' 2"	2,004 (909)	2" - 12"	2-1/2"
RCF(M)3696	40 - 130	8' (244)	8' 7"	N/A	8' 10"	1,838 (834)	2" - 12"	3"
RCF(M)3610	50 - 130	10' (305)	10' 6-1/2"	N/A	10' 2"	2,310 (1,048)	2" - 12"	3"
RCFM4014	80 - 250	14' (427)	14' 6-1/2"	N/A	10' 1/2"	3,095 (1,404)	2" - 12"	3"
RC2512	40 - 100	12' (366)	12' 7"	7' 11"	13' 3"	2,540 (1,152)	1-1/2" - 12"	1-1/2"
RC2515	50 - 100	15' (457)	15' 7"	8' 4"	15' 6"	3,255 (1,476)	2" - 13"	1-1/2"
RC(M)3615	50-160	15' (457)	15' 8"	8'	15' 6"	3,730 (1,692)	2" - 14"	2-1/2"
RC(M)3614	70 - 160	14' (426)	15'	8' 9"	17' 6"	5,990 (2,717)	2" - 12"	2"
RC(M)4015	50 - 200	15' (457)	15' 9"	8'	15' 6"	3,930 (1,782)	2" - 14"	3-1/2"
RC(M)4615	50 - 250	15' (457)	15' 8"	10' 3"	16'	4,550 (2,064)	2" - 14"	3-1/2"
RC(M)4620	70 - 250	20' (607)	20' 10"	9' 11"	17' 6"	6,280 (2,849)	2" - 12"	3"
RC(M)4614	70 - 250	13' 6" (411)	14' 9-1/4"	9' 2-3/4"	17' 8-1/2"	6,125 (2,778)	2" - 12"	3"
RC(M)5610	50 - 250	10' 6" (320)	11' 7"	7' 6-1/2"	16' 5"	5,292 (2,400)	2" - 14"	4"
RC(M)5615	50 - 250	15' (457)	15' 8"	9' 1"	16'	5,446 (2,470)	2" - 14"	4"
RC(M)6615	50 - 250	15' (457)	15' 8"	9' 1"	16'	5,660 (2,567)	2" - 14"	4-1/2"
RCB(M)6615	50 - 250	15' (457)	15' 8"	9' 1"	17' 1"	5,738 (2,603)	2" - 14"	4-1/2"
RC(M)6610	50 - 250	10' 6" (320)	11' 7"	7' 6-1/2"	16' 5"	5,292 (2,400)	2" - 14"	4-1/2"
RCB(M)6610	70 - 160	20' (607)	20' 10"	9' 11"	17' 6"	6,280 (2,849)	2" - 12"	2"
RC(M)5014	70 - 250	13' 6" (415)	14' 7"	8' 9"	19' 3"	7,282 (3,303)	2" - 14"	3"
RC(M)5020	70 - 250	20' (607)	20' 9-1/2"	8' 9"	19' 3"	6,528 (2,961)	2" - 14"	3"

Specifications are subject to change without prior notification.

Based on field performance.