

ULTRA-CHISEL™

MODELS: 6321UC | 6324UC | 6327UC | 6329UC | 6330UC | 6333UC | 6539UC | 6541UC | 6543UC | 6545UC

VERTICAL TILLAGE

Offered in working widths from 21' to 45', these heavy-duty chisel plows feature 900 lb. trip force for consistent tillage in the 8" depth range. The Ultra-Chisel's optional rocking bolster system on the center rockshaft ensures even, steady depth control in undulating field conditions, offering unmatched depth uniformity when compared to other large tillage tools in today's chisel marketplace.

The Ultra-Chisel does a complete job of tilling the entire 6" to 8" soil profile, often eliminating the need for a

follow-up pass prior to the seedbed preparation pass. To create a vertically-tilled soil environment, Ultra-Chisel can be equipped with 7" wing points, which are specially designed to create total fracture across the entire profile rather than just rip slots in the soil. Alternatively, large 12" or 16" sweeps can be used for deep tillage and weed control. Optional rear-leveling attachments include a five-bar high-residue spike harrow, a three-bar heavy coil tine, or a three-bar heavy coil tine with a finishing reel.




FEATURES & BENEFITS

- **Walking Tandem and Rocking Bolster to Hug the Ground** - Front walking tandems caster, and a center-compensating rocking bolster on 5-section models keeps all four sets of center-frame walking tandems firmly on the ground in uneven terrain.
- **Floating Hitch** - The floating hitch pivots with the tractor, independently of the machine's frame, so all wheels remain on the ground. This enables all transport tires to carry the whole weight of the machine and ensures uniform, even tillage.
- **Shank Spacing Options** - Available in 9" or 12" shank spacing for maximum horizontal fracture, with an 8" maximum working depth and optional 12" or 16" sweeps to undercut weeds.
- **Heavy-Duty Chisel Shank** - The Ultra-Chisel's spring-loaded shanks have 900 lbs. of trip force and 30" of underframe clearance.
- **Heavy-Duty Spring Tine Harrow with Optional Reel** - With three-position adjustable angling, these longer, heavy-duty spring tines increase trash flow while filling in ruts and leveling fields in one pass.



WALKING TANDEM

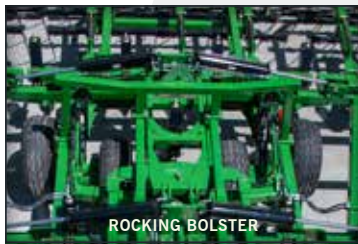

ROCKING BOLSTER

STANDARD EQUIPMENT

- Walking tandems
- Single-point depth control
- Narrow-profile floating hitch
- LED safety lighting
- Heat-treated ductile cast tongue
- Rephasing lift cylinders
- Maintenance-free bearings
- Cast Cat. III, Cat. IV, or Cat. V hitch

OPTIONAL EQUIPMENT

- 3-bar heavy coil tine
- 3-bar heavy coil tine and finishing reel
- 5-bar high-residue spike harrow
- Leveling kit for rocking bolster (21'-29' models)

Ultra-Chisel™	6321UC	6324UC	6327UC	6329UC	6330UC	6333UC	6539UC	6541UC	6543UC	6545UC
Recommended Use	Primary Tillage									
Shank Spacing	9" 12"									
Tillage Width	21' 9" 21' 9"	24' 9" 23' 9"	27' 9" 27' 9"	29' 3" 29' 9"	30' 9" 30' 9"	33' 9" 32' 9"	38' 3" 39'	39' 9" 41'	42' 9" 43'	45' 9" 45'
Transport Width	13' 8"	13' 8"	13' 8"	13' 8"	16' 8"	16' 8"	16' 1"	16' 1"	16' 1"	16' 1"
Transport Height	10' 10" 10' 10"	12' 4" 11' 10"	13' 10" 13' 10"	14' 7" 14' 10"	13' 10" 13' 10"	15' 4" 14' 10"	13' 3" 13' 5"	13' 3" 13' 5"	13' 8" 13' 10"	13' 8" 13' 10"
H.P. Requirements	190+	200+	240+	250+	250+	325+	330+	330+	345+	360+
Weight (lbs)*	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Specifications are subject to change without prior notification. Images may or may not depict current production models.

*Approximate maximum weights with attachments